
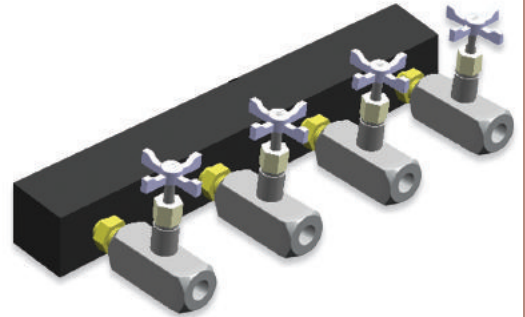
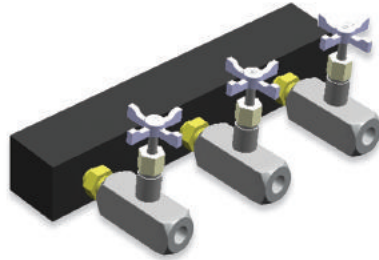



Sare®

GLOBAL
High quality Turkish brand

DATA SHEET

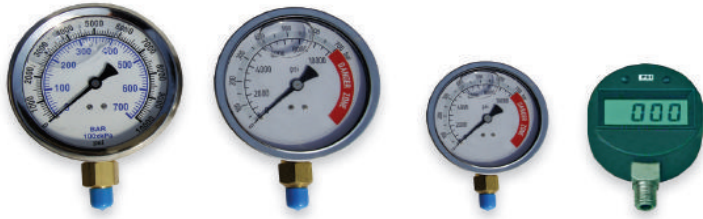

HYDRAULIC
SYSTEMS FOR
BRIDGE
CONSTRUCTION
AND
REPAIRS


Accessories



Hydraulic Accessories

- Gauges
- Quick Couplers
- Hoses
- Manifolds



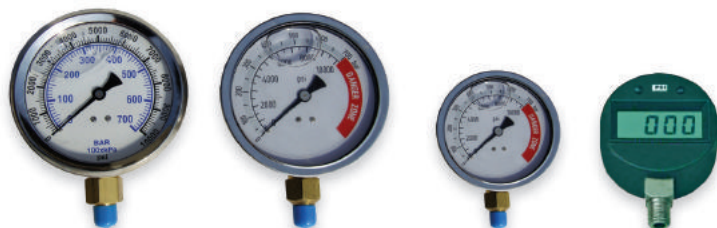

Model No.	Pressure Range	Scale Diameter	Oil Port	Description
	bar	mm		
G-637D	0-700	63	1/4"	Glycerine filled. 0-700 bar calibrated scale 700-1000 bar as a danger zone. 50 bar increment.
G-1007D		100		
G-1007				63
GD-1		Digital gauge		




GLOBAL
High quality Turkish brand



Model No.			Description
Complete Set	Female	Male	
C-209	C-211	C-213	Coupler 3/8" NPT threads max. flow capacity 35 l/min
CT-200	CT-202	CT-201	Coupler 1/4" NPT threads max. flow capacity 8 l/min






Model No.	Hose Length	Hose End	Hose End	Internal Diameter	Max. Working Pressure
	m			mm	bar
HS-2201	1	 <p>3/8" NPT male 3/8" NPT male</p> <p>sare®</p> <p>GLOBAL High quality Turkish brand</p>	6,40	700	
HS-2202	2				
HS-2203	3				
HS-2204	4				
HS-2206	6				
HS-2208	8				
HS-2210	10				
HS-2212	12				
HS-2215	15				
HSC-2201	1				 <p>3/8" NPT male C-213 male coupler</p>
HSC-2202	2				
HSC-2203	3				
HSC-2204	4				
HSC-2206	6				
HSC-2208	8				
HSC-2210	10				
HSC-2212	12				
HSC-2215	15				





Manifold blocks are used when several hydraulic cylinders have to be connected to one hydraulic pump. All manifold blocks are equipped with 3/8" NPT inner oil ports

Model No.	Manifold Type	Oil Port No.	Dimensions	Working Pressure	Weight
			mm	bar	kg
MS-2	Manifold block with 3 x 3/8" NPT female ports	3	40 x 40 x 100	700	1,30
MS-3	Manifold block with 4 x 3/8" NPT female ports	4	40 x 40 x 140		1,80
MS-4	Manifold block with 5 x 3/8" NPT female ports	5	40 x 40 x 180		2,30
MS-5	Manifold block with 6 x 3/8" NPT female ports	6	50 x 50 x 150		3,00
MS-6	Manifold block with 7 x 3/8" NPT female ports	7	50 x 50 x 150		3,00

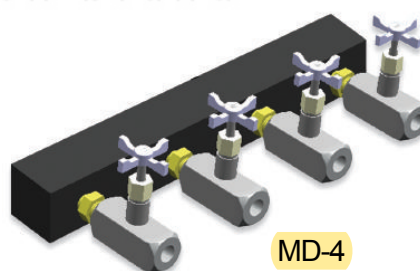

Manifold with shut-off valves are when different pressures must be maintained in each hydraulic line and therefore allow the lifting of unequal loads.

Model No.	Manifold Type	Oil Port No.	Dimensions	Working Pressure	Weight
			mm	bar	kg
MD-2	Manifold with 2 shut-off valves	3	50 x 50 x 140	700	3,80
MD-3	Manifold with 3 shut-off valves	4	50 x 50 x 220		5,90
MD-4	Manifold with 4 shut-off valves	5	50 x 50 x 300		8,00
MD-5	Manifold with 5 shut-off valves	6	50 x 50 x 230		7,10
MD-6	Manifold with 6 shut-off valves	7	50 x 50 x 240		7,80

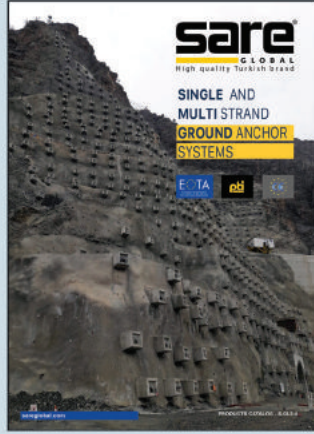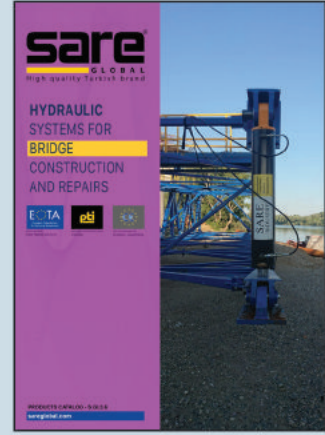

sare[®]
GLOBAL
High Quality Turkish Brand

Merkez Mah. Çavuşbaşı Cad. No.42 D.5-8 Çekmeköy 34782 İstanbul - Türkiye
P: +90 216 313 11 13 pbx
info@sareglobal.com • www.sareglobal.com

