

DATA SHEET



SSA Series

Single acting
Short stroke
Load return
20 - 100 ton capacity
40 - 75 mm stroke
Totally 28 models



HYDRAULIC
SYSTEMS FOR
BRIDGE
CONSTRUCTION
AND
REPAIRS


SSA Series







SSA Series

Single acting, short stroke
 Load return
 20 - 100 ton capacity
 40 - 75 mm stroke
 Totally 28 models
 700 bar maximum operating pressure



Model No.	Capacity ton	A	B	C	D	Effective Area cm ²	Oil Capacity cm ³	Weight kg
		Stroke mm	Closed Height mm	Outside Diameter mm	Rod Diameter mm			
SSA-204	20	40	90	98	55	33,18	133	4,6
SSA-205		50	104				166	5,4
SSA-206		60	114				199	6,1
SSA-208		75	129				249	7,1
SSA-304	30	40	101	119	70	50,26	201	7,5
SSA-305		50	111				251	8,2
SSA-306		60	121				302	8,9
SSA-308		75	136				377	9,9
SSA-404	40	40	102	129	80	63,62	255	9,3
SSA-405		50	112				318	10,4
SSA-406		60	122				382	11,5
SSA-408		75	137				477	13,0
SSA-504	50	40	106	143	90	78,54	314	11,5
SSA-505		50	116				393	12,5
SSA-506		60	126				471	13,6
SSA-508		75	141				589	15,2
SSA-604	60	40	109	155	95	95,03	380	14,1
SSA-605		50	119				475	15,0
SSA-606		60	129				570	16,5
SSA-608		75	144				713	18,2
SSA-804	80	40	113	169	110	113,10	453	18,3
SSA-805		50	123				566	20,2
SSA-806		60	133				679	21,9
SSA-808		75	148				848	24,0
SSA-1004	100	40	120	186	120	143,13	573	23,3
SSA-1005		50	130				716	24,3
SSA-1006		60	140				859	27,0
SSA-1008		75	155				1074	29,0

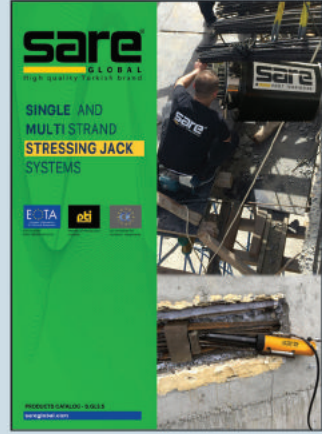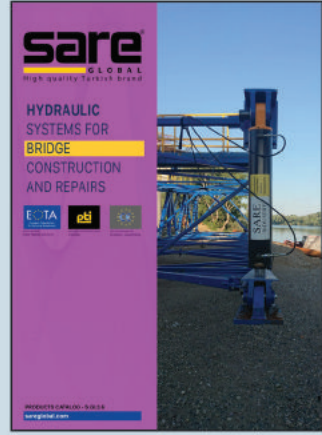

sare[®]
GLOBAL
High Quality Turkish Brand

Merkez Mah. Çavuşbaşı Cad. No.42 D.5-8 Çekmeköy 34782 İstanbul - Türkiye
P: +90 216 313 11 13 pbx
info@sareglobal.com • www.sareglobal.com

