

**sare**<sup>®</sup>  
GLOBAL  
High quality Turkish brand

# DATA SHEET



**Hollow  
Jacks**

**HCH Series**

Double acting  
Hydraulic return  
150-300 ton capacity  
50-300 mm stroke  
Totally 24 models



**HYDRAULIC  
SYSTEMS FOR  
BRIDGE  
CONSTRUCTION  
AND  
REPAIRS**


**HCH Series**








**HCH Series**

Double acting  
Hydraulic return  
Center hole  
150 - 300 ton capacity  
50 - 300 mm stroke  
Totally 24 models  
700 bar maximum operating pressure



Model No.	Capacity ton	A	B	C	D	Effective Area cm <sup>2</sup>	Oil Capacity cm <sup>3</sup>	Weight kg
		Stroke mm	Closed Height mm	Outside Diameter mm	Rod Diameter mm			
HCH-1505/78	150	50	167	245	155	205,00	551	51,0
HCH-15010/78		100	275				1102	79,5
HCH-15015/78		150	325				1653	92,5
HCH-15020/78		200	375				2204	105,5
HCH-15025/78		250	425				2755	108,5
HCH-15030/78		300	475				3306	131,5
HCH-2005/92	200	50	191	287	175	293,74	684	80,0
HCH-20010/92		100	300				1368	117,0
HCH-20015/92		150	350				2052	134,0
HCH-20020/92		200	400				2736	151,0
HCH-20025/92		250	450				3420	168,0
HCH-20030/92		300	500				4104	185,0
HCH-2505/106	250	50	200	320	200	358,14	908	103,0
HCH-25010/106		100	315				1816	153,5
HCH-25015/106		150	365				2724	175,0
HCH-25020/106		200	415				3632	196,5
HCH-25025/106		250	465				4540	218,0
HCH-25030/106		300	515				5448	239,5
HCH-3005/125	300	50	210	347	225	417,25	1106	126,0
HCH-30010/125		100	325				2212	200,5
HCH-30015/125		150	375				3318	225,0
HCH-30020/125		200	425				4424	250,5
HCH-30025/125		250	475				5530	275,0
HCH-30030/125		300	525				6636	300,5

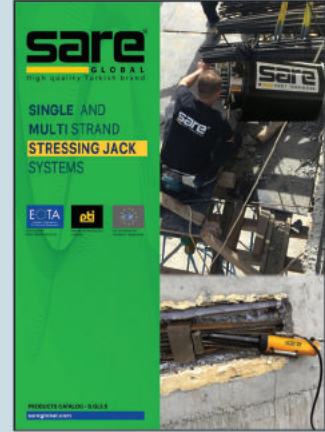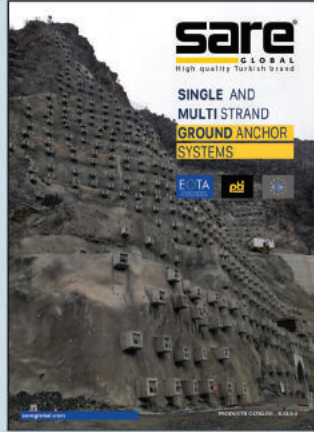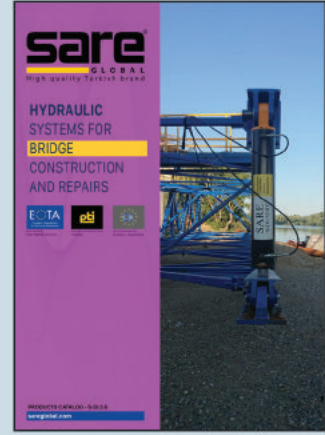

**sare**<sup>®</sup>  
GLOBAL  
High Quality Turkish Brand

Merkez Mah. Çavuşbaşı Cad. No.42 D.5-8 Çekmeköy 34782 İstanbul - Türkiye  
P: +90 216 313 11 13 pbx  
info@sareglobal.com • www.sareglobal.com

